

## HOOKED END STEEL FIBER


### DATA SHEET

#### Type of Steel Fiber

HF4550L\_900 MPa



#### Geometry

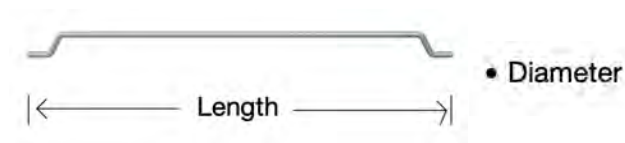

- Diameter: 1,10 mm
- Length: 50 mm
- Aspect (L/D) Ratio: 45

#### Tensile Strength

-900 MPa

#### Numbers per Kg

-approx. 2650 pieces

#### Glued/Loose Type

-loose

#### Beneficial Effects

- improve fatigue strength, shear strength, bending strength and impact resistance of concrete
- increase crack resistance, durability and toughness of concrete
- less labor costs and less time consuming
- less maintenance costs

#### Application

- industrial floors
- shotcrete for tunnels and mines
- precast units

#### Packaging

- 10-20kg small bag
- 500-1200kg bulk bag
- 20kg paper box

#### Handling

- keep dry
- no stacking

#### Conform to

- ASTM A820
- EN14889-1

#### Approves



### TIANJIN HENGFENG XUXIANG METAL


### NEW MATERIALS INC.

Nanmadan Industrial Park, Beichen District,  
Tianjin City, China.

Facebook: Hffibers Co

Email: omarg.sarabia@omsar.com.mx

Tel: 55 2699 9883

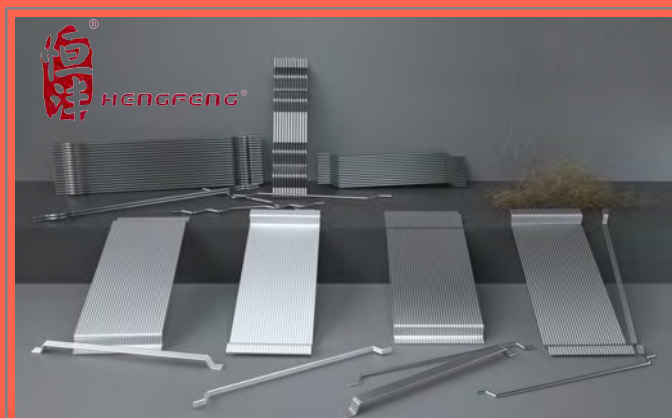

HENGFENG STEEL FIBER FAMILY